

# VISSONIC

Professional Audio Video Manufacturer

## Full Digital Multi-media Conference Unit VIS-DMD-T



Product Datasheet



**VISSONIC ELECTRONICS LTD.**

**Think Solution**

# Application diagram

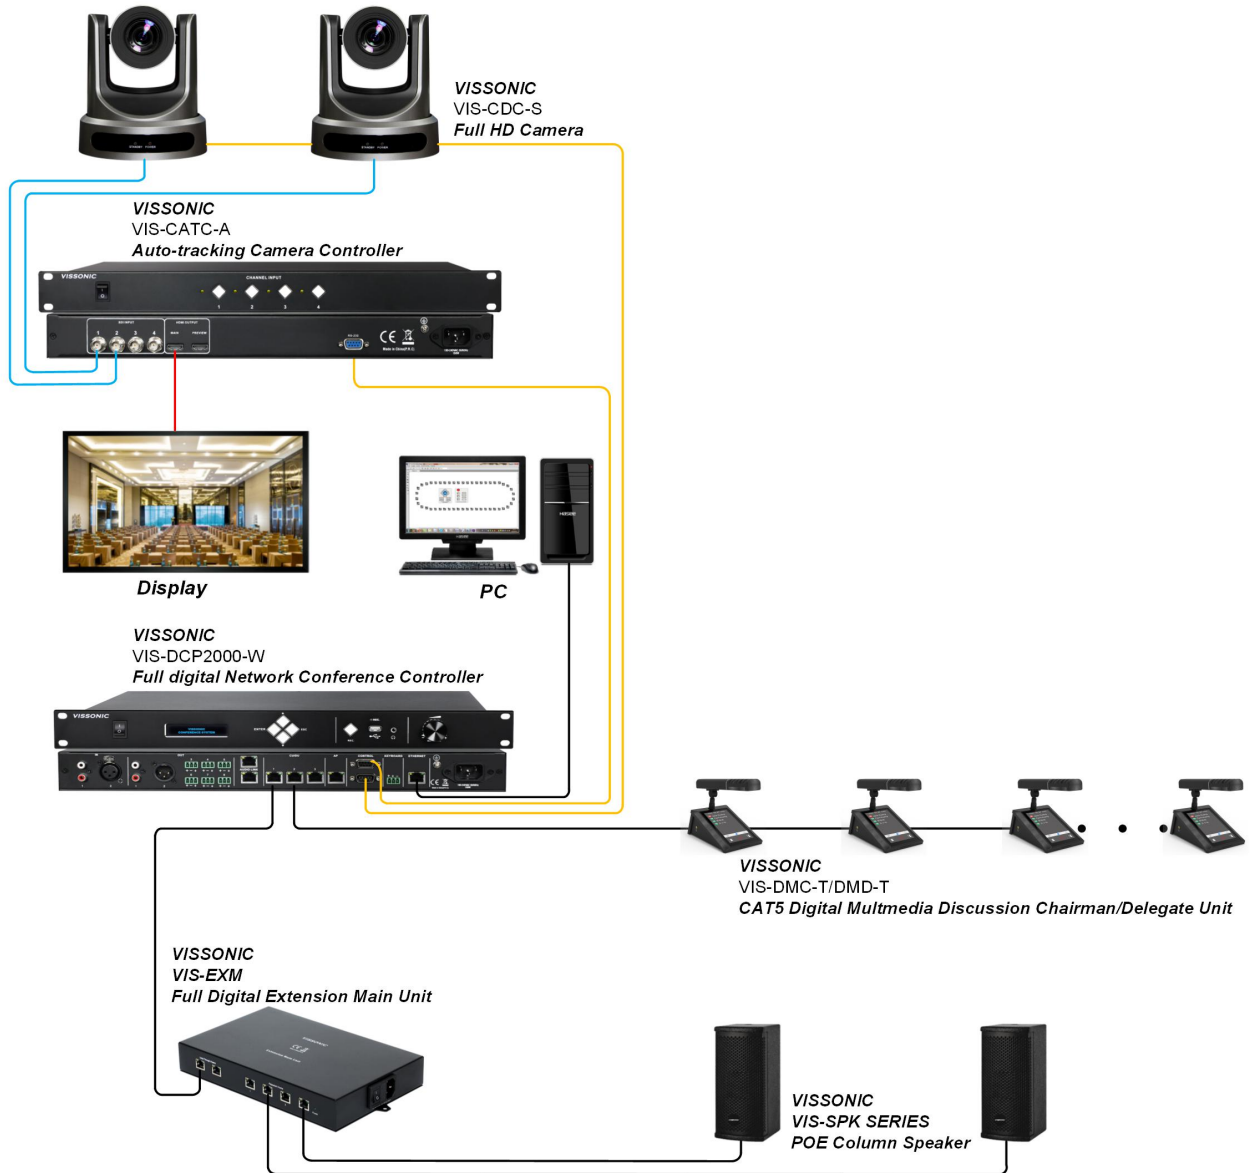

# New Generation **Full Digital** **Network** Conference System, with High Tech in DSP unique Sound Processing

## **CLEACON Full Digital Networked DSP Conference System**

### **Compact yet versatile design**

We are well aware that the main body of the meeting is the participants, so the product design reflects the elegant, yet compact and easy to use features. Common CAT5e connection ensures fast and easy to build any sized meeting occasions, conference unit features a graphical interface operating area, including lighting reminder, anyone can get started quickly. Easy to install, user-friendly to use, and is designed to ensure higher productive meetings.

### **Excellent sound performance**

Advanced voice processing technology, with the unique design of the microphone, this unit can be accurate pickup and restore the human voice through a high-quality built-in speakers or an external PA system, original AUDIO-LINK digital ring network technology, Automatic Gain Control Volume(AGC) / automatic frequency control(AFC) technology help reach higher volume without triggering the howling effect, ensures each word spoken is well understood.

### **High tech intelligence platform**

Timing function, overtime reminder, voting results multi-platform synchronization, network control and meeting management, conference Smart reservation, worldwide firmware real-time updates, the integration of IT technologies ensures smart conferencing platform, the CLEACON series is one of them.

### **Complete easy-handling management**

The Central Unit is the center of the system –Provide power to the whole discussion units, control the cameras and link to other third-party devices. The 1U compact design is easily to put anywhere while keep a low profile in meeting room.

### **Simple control with convenient recording**

We try to use less buttons to simplify the operation, and a LCD screen helps you monitor real-time action obviously. The USB slot enable it record every important meeting discussion, to file up every contents simply

## VIS-DCP2000-D

Full Digital Networked DSP Conference Processor for wired units



### Features

- The unique AUDIO-LINK digital ring network technology achieve full-digital signal transmission and processing
- One CAT5e cable to transmit up 64 channels audio and other signals.
- All microphone units support audio, ID independent output. Working with voice recognition system to achieve voice role separation.
- High-fidelity sound quality by lossless audio transmission technology, 48K audio sampling rate and 20Hz ~ 20KHz frequency response
- A single conference controller can realize the independent control and merging of 4 conference rooms, can handle the cascade of multiple conference controllers to realize the merging and separation of larger conference rooms (Optional).
- "Hand-in-Hand-Loop-Network" connection makes the system always working perfectly no matter changing discussion unit or having any malfunctioned units
- The sensitivity of the unit microphone and 8 segment equalizer EQ adjusted independently.
- Conference controller can output 16 segment equalized EQ to achieve sound field adjustment; pressure limit, which can recognize the noise gate passed by human voice. AGC automatic volume gain control; AFC automatic feedback suppression and auto-mix technology.
- Sound output by separated zones function, each zone is automatically adjusted according to the volume of the position of the microphone, achieve longer distances pickup without whistle.
- Echo cancellation, remote two-way real-time call with another conference controller or another third-party video conferencing terminal.
- USB recording, controller monitor, advanced noise cancellation technology to realize clearer recording.
- System date, time management, and support count-down speech.
- Optional DANTE output module with other DANTE equipment used.
- Can drive 2x120W POE speaker, through extension main unit, support up to 16 POE speakers.

### Functions

- Compliance with IEC 60914, GBT 15381-94
- Connect with VIS-EXM full-digital extension main unit, it can expand to 5200 discussion units
- "Hand-in-Hand-Loop-Network" connection and the system assigned to each unit independently ID to avoid ID conflict.
- Only wired discussion units can connect to the controller, fast and easily to adding delegate of meetings.

- 2 channel audio input, XLR or RCA type, for local audio input or remote video-conferencing input.
- Maximum 8-channel audio output, XLR, RCA or Phoenix type, can be connected to simultaneous interpretation output or partitioned output.
- Add the audio input box, the system can be connected to other condenser microphones or dynamic microphones, more choices for users.
- Built-in multi-way internal communication function.
- TCP/IP connection between controller and PC
- RS232 central control, realize microphone switch, priority, volume and other controls.
- RS232 or RS485 to send the PELCO/VISCA protocol to realize camera auto-tracking function.
- Hot plug-and-play, and auto-recovery function.
- Wide range of voltage from 100V~240VAC
- Without using PC software, our conference controller still owns following settings:
  - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units), supports up to open 32 wired microphones in full-on mode.
  - Discussion modes:

"**OPEN**" Free for all, limited by the active units setting by controller, "**VOICE**" Can activate MIC by detecting sound without press button, "**OVERRIDE**" First in First out, "**APPLY**" To apply then to speak, "**PTT**" Press to speak(Optional),"**ALL**" Full open mode(Optional).

- Voting function: Approve/Abstain/Object
- Chairman unit has priority to close all other units or mute them temporarily
- Chairman unit can consent the application for speaking from delegate
- Simultaneous language interpretation
- With PC software to add more ways of voting:
  - Approve/Object
  - Approve/Abstain/Object
  - Level: 1/2/3/4/5
  - Ranking: --/0/+/++
- By using RFID card to identify, can realize voting with names.

## *Control & Indicators*

LCD display to show all the operations and results

4-Way button for menu operate

One-button press to start recording

light indicator

Master volume control knob

## *Interfaces*

Front panel USB recording interface

3.5mm headphone for monitoring

1x RCA audio input

1x XLR audio input

1x RCA audio output

1x XLR audio output

- 6x Phoenix audio output connector
- 2x RJ45 digital audio connection
- 2x RJ45 for chairman unit, delegate unit, unit translators and other connection
- 1x RJ45 for wireless AP or router
- 1x DP9 male interface for external control
- 1x DP9 female interface for camera
- 1x three-pin phoenix interface for camera control keyboard
- 1x RJ45 for computer connection or network switcher
- 1x grounding screw
- 1x 100 ~ 240V AC Power Interface

### *Technical Parameters*

- Power 100V / 240V AC
- Static power consumption 12W
- Maximum power consumption 150W
- Frequency Response 20Hz ~ 20KHz
- Noise ratio (S / N) > 80dB
- Total harmonic distortion < 0.05%
- Channel Crosstalk > 80dB
- Dimensions (mm) 481L x 265W x 46H
- Black color

### *Item Model for Order*

- VIS-DCP2000-D..... Full digital network DSP conference processor

## CLEACON Series VIS-DMD-T

Multimedia digital conference unit with touch screen



The VIS-DMD-T is a multimedia conference unit based on the VISSONIC AUDIOLINK IP network technology. It is equipped with a 5-inch IPS touch screen, which improves the flexibility of the conference and the interactivity of the meeting content.


This unit can set as chairman, delegate, VIP or dual-user unit according to the requirements of the conference. As the various requirements of meeting, it can upgrade the software to achieve more functions without changing unit or hardware.

The current software module contains five functions:

- Vote
- NFC card identification
- Simultaneous interpretation channel
- Dual user
- Bluetooth

By chairman unit, you can use the touch screen on the VIS-DMD-T unit to manage different aspects of the meeting. It allows you to start, pause meetings, view request-to-speak lists, approve request, view addresser profiles and speaking times, and even record meetings, easily start and stop voting etc.

By delegate unit, you can view the agenda and the remaining time to speak. You can even see who is speaking and the position you are on the speaking list.

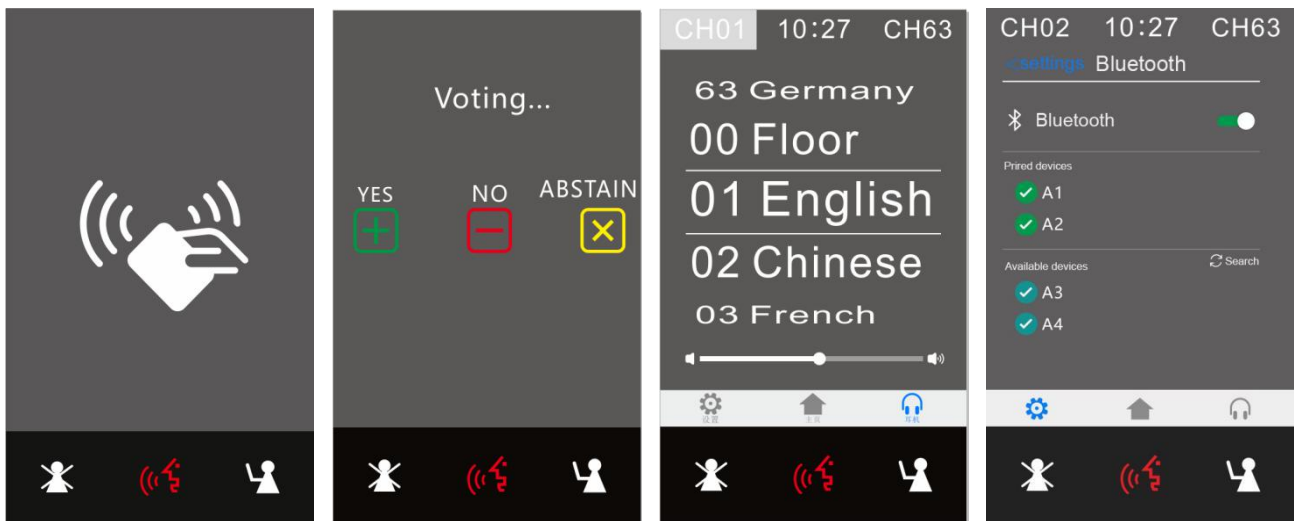

## Features

- Compatible with IEC 60914, GBT 15381-94 standard
- The unique AUDIO-LINK digital network technology realizes full digital signal transmission and processing.
- Single CAT5e cable transmits 64 channels of audio and various information.
- High-fidelity sound quality, lossless audio transmission technology, 48K audio sampling frequency, 20Hz ~ 20KHz response frequency.
- Conference controller can output 16 segment equalized EQ to achieve sound field adjustment; pressure limit, which can recognize the noise gate passed by human voice; AGC automatic volume gain control; AFC automatic feedback suppression and auto-mix technology.
- 5-inch capacitive touch screen and built-in NFC card reader can quickly identify participants
- All-in-one touch screen conference unit, it can be configured as a chairman unit, delegate unit, VIP unit or dual delegate unit
- Easily expand functions by setting software modules

## Functions

- The design is compact, modern and with latest VISSONIC technology
- Adopt standard CAT5e with RJ45 connector as the connection cable, which is convenient for standardized engineering wiring installation and maintenance.
- All-in-one touch screen unit can be set as the chairman, delegate, VIP or dual delegate unit via conference system software or the menu of conference controller front panel.
- Chairman unit can pause the delegate's speech, close the delegate's speech, view the speaking request list, agree or reject the delegate's speech request, and functions of starting conference recording, stopping recording, selecting conference topics, initiating sign-in, and voting.
- Delegate unit can request to speak and view your position in the request list, information of the addresser, and view the meeting topic.
- The system can set up to 32 VIP delegate units. As long as the total number of microphones already turned on in the system does not exceed 8, the VIP delegate unit can be turned on freely.



- Contains five optional function modules:
  - Voting: three-button / two-button voting
  - NFC identification: Sign in with NFC card to accurately identify user information.
  - Simultaneous interpretation channel: support 2 language channel selectors, each selector supports 64 languages independent selection.
  - Dual users: Support two participants sharing one unit to achieve camera tracking at two locations; enabling two delegates to vote on one unit.
  - Bluetooth: can be connected to hearing aids etc.
- 5-inch capacitive touch screen displays conference information, such as agenda, addresser information, addresser list and request-to-speak list, speech timing, timing speaking, current time and date, Chinese and English switching, and checking unit version information.
- The conference unit has sign-in function and service function through the touch screen
- Supports set the current microphone sensitivity and 8-band equalizer EQ adjustment.
- Can be configured with gooseneck microphone or rectangular digital and analog dual backup microphone
- Dual headphone port design, volume can be adjusted through touch screen
- Hand-in-hand-loop-network connection and star connection, the system is more reliable. Replacement one unit and failure of cable will not affect the normal operation of other units in the system.
- Hot plug-and-play, automatic recovery.
- The number of speakers limit function: you can set the speaker units that are turned on at the same time (the number is 1/2/4/6, and a maximum of 32 units are allowed to speak in the full-open mode)
- Has the following speaking modes:
  - "OPEN" open mode, "VOICE" voice control mode, "OVERRIDE" mode, "APPLY" application mode, "PTT" press and hold to speak (optional), "ALL" full open mode (optional)
- Combined with camera and a camera tracking controller, it has an automatic camera tracking function.

### *Control & Indicators*

Microphone with two-color LED ring, red indicates speaking status, green indicates request to speak

5-inch capacitive IPS touch display.

Microphone switch button

Chairman unit with priority button and approve to speak button

### *Connection*

Pluggable microphone connection base

Two 3.5mm stereo Headphone jacks

Two RJ45 connectors

### *Technical parameter*

Screen size :109.22 mm (5.0 inches)

Resolution: 800x480

Screen type: Capacitive multi-touch

Contactless NFC cards in following standards: ISO / IEC14443 Type A

Connection method: CAT5 / CAT6 cable + buckle

## Electrical parameters

Power: 48V DC

Supply consumption: 5 W

Frequency response : 20~20000Hz

THD at rated level <0.1%

Dynamic range > 90 dB

S / N ratio > 90 dB

THD at rated level <0.1%

## Audio input

Nominal microphone input 80 dB SPL in accordance with IEC60914

Maximum sound pressure 125dB (THD <3%), in line with IEC60914

Sensitivity -46 dBV / Pa

## Audio output

Headphone load 16Ω Headphone volume 10mW

Headphone port 3.5mm stereo socket Input impedance 2kΩ

## Mechanical parameter

Installation: desktop

Dimensions (mm, without microphone): 160L x 100W x 65H

Color: Black

Weight: 0.7KG (base)

Environmental parameters

Operating temperature 5 °C to +55 °C

Relative humidity <90%

## *Item Model for Order*

VIS-DMD-T ..... Multimedia touch screen conference unit

VIS-DCP2000-D ..... Full Digital Network DSP Conference controller

VIS-MDA ..... Rectangular microphone, Digital + Analog output dual backup microphone

VIS-M220 ..... 220mm microphone (black) with anti-wind foam cover

VIS-M330 ..... 330mm microphone (black) with anti-wind foam cover

VIS-M410 ..... 410mm microphone (black) with anti-wind foam cover

VIS-M480 ..... 480mm microphone (black) with anti-wind foam cover

VIS-M600 ..... 600mm microphone (black) with anti-wind foam cover

## Optional function license

VIS-LLGE ..... Dual 64-channel selector software module

VIS-LVOTE ..... Vote software module

VIS-LIDEN ..... NFC identification software module

VIS-LDUAL ..... Dual user software module

VIS-HLBLTH ..... Bluetooth Hearing Software Module

## VIS-MDM Square Type Microphone



### Feature

Short Square Shape with modern design, low profile in front of speaking person  
Long distance voice pickup up to 80cm  
Mic ON/OFF Light indicators on both sides.

4-direction angle adjustable, 90° from left to right. 120° from up to down

### Application

Designed for high quality sound reproduction in venues such as boardrooms, conference rooms, courtrooms and other such venues.

The effective sound reception angle of 90° can prevent interference from adjacent microphones and suppress howling.

### Parameters

Directivity	Cardioid
Frequency response	60Hz~17KHz
Mic Capsule	2
Sensitivity	-37dB+/-3dB@1KHz (0dB=1V/Pa)
Input impedance	200 Ohms
SNR	69dB (A)
The maximum sound pressure	125dB at 1KHz 1% T.H.D.
Power supply	9-48V Phantom Power
External interface	6-pin/XLR
Weight	180g
Size	36*24*216 (mm) WxHxL
Color	Matte black

**VIS-M600/VIS-M485/VIS-M410/VIS-M330/VIS-M220**

Pluggable Gooseneck Microphone



**Features**

- Precise directional microphone head with Mini design
- Two color LED ring indicator
- anti-wind microphone foam cover
- Strong audio collection ability to work with different length of microphone

**Functions**

- Two-color LED indicator on microphone, red for speaking, green means need acceptance from chairman to speak
- Screw lock socket to connect removable microphone

**Technical Parameters**

Item	VIS-M600	VIS-M485	VIS-M410	VIS-M330	VIS-M220
Directivity	Cardioid				
Sensitivity	-46dBV/Pa				
Frequency response	30Hz~20KHz				
Equivalent noise	20dBA (SPL)				
Signal-To-Noise Ratio Ref	≥96dB				
Microphone Type	Condenser				
Maximum SPL (1 kHz at 1% THD, 1 kΩ load)	125dB ( THD<3% )				
Conference unit connection	Mini 6 pin.				
Input impedance	2 k Ω				

Working temperature	0~45℃				
Storage temperature	-20~50℃				
Weight	88.5g	78g	72g	62g	58g
Length	600mm	485mm	410mm	330mm	220mm
Color	black				

### *Item Model for Order*

- VIS-M220.....Pluggable Gooseneck Microphone 220mm, unique design
- VIS-M330.....330mm Microphone, with anti-wind foam cover
- VIS-M410.....410mm Microphone, with anti-wind foam cover
- VIS-M485.....485mm Microphone, with anti-wind foam cover
- VIS-M600.....600mm Microphone, with anti-wind foam cover

## VIS-HL002/ HL003/ HL005/ HL010/ HL020/ HL050/HL100

Professional CAT5E conference extension cables



### *Features*

- TIA/EIA 568B CAT5E
- ISO/IEC 11801 ClassD
- CELENEC EN50173, EN50167, EN50169
- UL C(UL)&ETL Verified
- Pre-test by VISSONIC

### *Functions*

- Extension cable for main unit to CU/DU unit
- Carry 48DC power and signals
- Male to Male cable
- Size from 2m to 100m

### *Interfaces*

2x male RJ45

### *Technical Parameters*

Standard: TIA/EIA 568B CAT5E

Connector: Shielded RJ45

Shielding: F/UTP

Resistance: 100ohm±15%, 1MHz to 100MHz

Delay skew: 25ns/100m max

Gauge: 24AWG solid bare copper

Flame retardant rating: CM, IEC332/1

Storage Temperature: -20°C~80°C

Operation temperature: -20°C~60°C

*Item Model for Order*

- VIS-HL002..... 2m black shielded Cat5e U/FTP cable (shielded RJ45)
- VIS-HL003.....3m black shielded Cat5e U/FTP cable (shielded RJ45)
- VIS-HL005..... 5m black shielded Cat5e U/FTP cable (shielded RJ45)
- VIS-HL010..... 10m black shielded Cat5e U/FTP cable (shielded RJ45)
- VIS-HL020..... 20m black shielded Cat5e U/FTP cable (shielded RJ45)
- VIS-HL050..... 50m black shielded Cat5e U/FTP cable (shielded RJ45)
- VIS-HL100..... 100m black shielded Cat5e U/FTP cable (shielded RJ45)

**About VISSONIC Electronics Limited**

Our mission is to develop and manufacture the most comprehensive and innovative audio visual products for our clients. We provide the best performance/price ratio products because it could give you satisfaction just from the time you use them, we believe the good design with cutting edge technology on products will provide value to all our partners and end users. Listen to your demands, we fulfill it.



4/F, Building G7, No. 31 Kefeng Road, Huangpu district, Guangzhou, China

• Tel: +86-020-82515140 • E-mail: [info@vissonic.com](mailto:info@vissonic.com)

@2024 VISSONIC Electronics Ltd. all rights reserved.